

Move into the future with reliable measurements



# Encapsulated Gages

KHCX, KHCV, KHCR, KHCS, KHCM, KHC, KCW

Static/Dynamic Strain Measurement  
Max.

**950°C**  
(KHCX)



# KYOWA Encapsulated

## Contents

Types and typical applications.....	1
High-temperature encapsulated gages, Features.....	2
Temperature compensation methods and bridge circuits (KHCX, KHCR, KHCS, KHCM, KHC) .....	3
Normal-temperature encapsulated gages, Features .....	4
High-temperature encapsulated gages	
KHCS.....	5
KHCV .....	6
KHCR .....	7
KHCS.....	8
KHCM .....	9
KHC.....	10
Normal-temperature weldable waterproof foil strain gages	
KCW .....	11
Optional accessories	
Bridge box .....	12
Bridge adapter .....	12
Compression fitting.....	13
MI cable length codes and optional accessories.....	13
Compact spot welder for encapsulated gages GW-3C.....	14
In order to use encapsulated gages correctly .....	15
Performing a preliminary test .....	16



# Weldable Strain Gages

Encapsulated gage is a welded type strain gage with completely airtight structure. The product consists of a sensing part and a cable for outputting the signal output from the sensing part. Sensing part is comprised of a flange and an environmentally resistant metallic tube with encapsulated gage and insulator. The sensing part can be fixed to the measurement material by spot welding.

There are high-temperature and normal-temperature types. The high-temperature cables use an inorganic insulated MI cable (Mineral Insulated metal sheathed cable) in which a metal sheath is filled with heat resistant insulating material powder and a conductor is embedded inside. Using the high-temperature model, strain measurement can be conducted even at harsh environment involving high temperature, high pressure, and high humidity, such as nuclear-power generation, automobiles, and planes.

Normal-temperature cables use crosslinked polyethylene sheath (heat resistant up to 100°C), and has waterproof property as well as long-term stability. It can be applied to strain measurement in outdoor environment such as automobiles, civil engineering, and construction.

## Types and typical applications

Type	Normal Temp.	High Temp.					
Model	KCW	KHC	KHCM	KHCS	KHCR	KHCV	KHCX
Measuring strain	Static/Dynamic					Dynamic	Static/Dynamic
Max. oprg. temp.*1	100°C	500/550°C	650°C	750°C	750°C	800°C	950°C
Temp. comp.*2	Yes					No	Yes

\*1 Max. oprg. temp.: Max. operating temperature

\*2 Temp. comp.: Temperature compensation

Scope of application	0°C	100°C	200°C	300°C	400°C	500°C	600°C	700°C	800°C	900°C	1000°C
Energy	<div>Boiler water pump in thermal power stations</div> <div>Cooling pipes (pure water) in nuclear power stations</div> <div>Gas turbine combustors</div> <div>Heat exchangers in thermal power stations</div> <div>Nuclear fuel rods</div> <div>Cooling waterpipe (sodium) in nuclear power reactors</div> <div>Boiler steam turbines</div> <div>Fast breeder reactors</div> <div>Around nuclear power reactors</div> <div>Dynamic and stationary blades in high-temperature gas turbines</div> <div>High temperature gas furnaces</div>										
Plant Large structure	<div>Various plumbing of large plants</div> <div>Ship structures (in seawater)</div> <div>Underwater tests of steel reinforced concrete structures</div> <div>Around high-temperature furnaces for steel manufacturing</div> <div>Fireproof tests for steel reinforced concrete structure</div> <div>Petrochemical reactors</div> <div>Heat treatment furnaces</div> <div>Incinerators</div>										
Automobile Aviation Shipping	<div>Automobile intake blowers</div> <div>Automobile bodies (cold regions)</div> <div>Automobile cylinder heads</div> <div>Automobile pistons</div> <div>Automobile exhaust manifolds</div> <div>Automobile exhaust turbines</div> <div>Automobile exhaust mufflers</div> <div>Automobile exhaust valves</div> <div>Ship turbines</div> <div>Aircraft jet engine turbines</div>										

# High-temperature encapsulated gages

## Features

### Completely airtight structure and excellent environmental characteristics

Gages and lead-wire cables (MI cables) are covered and integrated with metals (such as Inconel 600) with excellent environmental properties including heat or corrosion resistance, and can be used in high temperature, high pressure environment, seawater, and pure water.


### Adopts heat resistant special alloy for strain-gage element.

### Able to be welded and easy handling at the measurement site

The gage can be mounted easily to the measurement material using spot welding, enabling measurement to be started immediately after installation.

### Provides high-precision measurement with minimal thermally-induced apparent strain (KHCX, KHCR, KHCS, KHCM, KHC)

Thermally-induced apparent strain is virtually eliminated through the use of active-dummy system with a temperature-compensating dummy gage inside the sensing part, a sensing part with linear expansion coefficient suitable for the measurement material, and a temperature-compensating resistor that compensates for the apparent strain generated by the linear expansion coefficient of the lead-wire cable in the measurement temperature range. Highly accurate measurements can be undertaken.

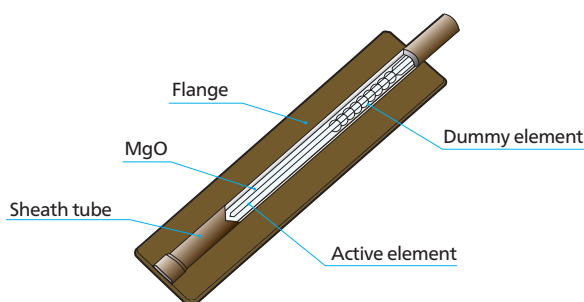


### Linear expansion coefficient of 11, 13, 16 $\times 10^{-6}/^{\circ}\text{C}$ selectable (KHCX: 11 and 13 $\times 10^{-6}/^{\circ}\text{C}$ only)

Other selections are available at your request. (The KHCV does not provide any temperature compensation since it is designed for dynamic strain measurement only.)


### Detailed test data sheet allows strain measurement to be conducted with high precision

The test data sheet provided with your product includes resistance data to compensate for the temperature and zero point (bridge balance). If a temperature range and the length of the heated portion of the MI cable are other than specifications shown in the graph below, submit your requirement and we can provide estimated data and graphs on the change in thermally-induced apparent strain and the gage factor. (Except for the KHCV type where only the gage factor is available).

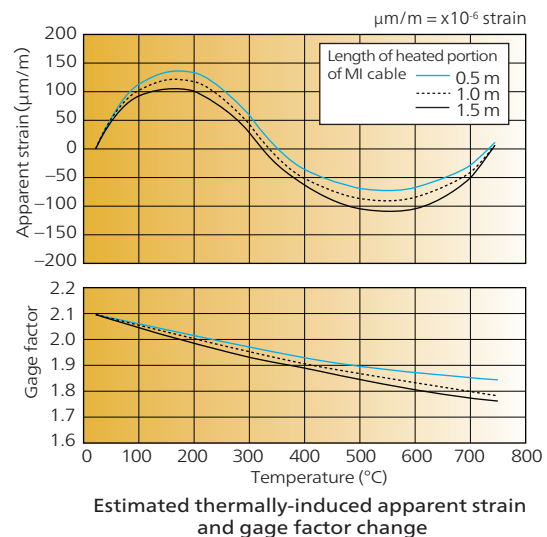

### Approximately 50% improvement in gage factor (compared to our previous products KHCV)

This is made possible through improved spot welding method and use of low resistance MI cable. We also achieved the gage resistance of 120 $\Omega$  at a gage length of 5 mm.

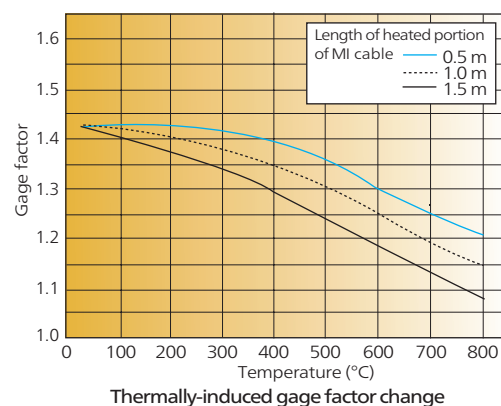


### Gages with bridge adaptor (optional) save labor and ensure high reliability

The bridge adaptor includes wiring for the temperature-compensating resistor (KHCX, KHCR, KHCS, KHCM, KHC), thus eliminating the need for wiring to the dedicated adaptor, and enabling easy connection to measurement devices.

# Temperature compensation methods and bridge circuits (KHGX, KHCR, KHCS, KHCM, KHC)

With the active-dummy system for temperature compensation in the bridge circuit using a foil strain gage, it is possible to compensate for the output due to the temperature coefficient of the resistor in the gage element and the output due to the difference in the linear expansion coefficients between the gage itself and the measurement material.

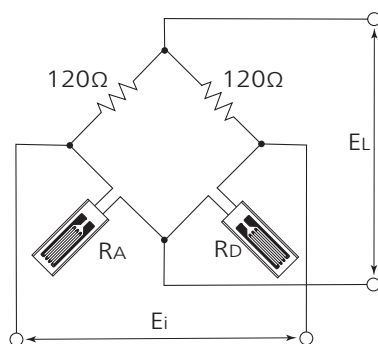


Temperature compensation circuit for foil strain gages

The dummy gage in encapsulated gage can compensate for the apparent strain caused by temperature coefficient of resistance but it has no sensitivity, therefore the latter of the above outputs cannot be compensated for. As a result, an output signal (apparent strain) equivalent to the difference in linear expansion coefficients between the active gage and the measurement material is produced. Therefore, an external temperature-compensating resistor ( $R_{TC}$ ) is inserted into the bridge circuit to compensate for the latter output. Furthermore, external temperature compensation resistor ( $R_{LC}$ ) is inserted to the bridge circuit to reduce the apparent strain initiated by the heated MI cable.

As the balance in the bridge is disturbed by the insertion of those resistors, a balance-adjustment resistor ( $R_{BAL}$ ) is also necessary. The individual resistance applied to each of these resistors depends on the temperature range best suited to your application.

A dedicated bridge adapter, as well as resistors, are available as options to enable the easy assembly of such a bridge circuit.

## Temperature compensation circuit of KHGX, KHCR, KHCS, KHCM and KHC

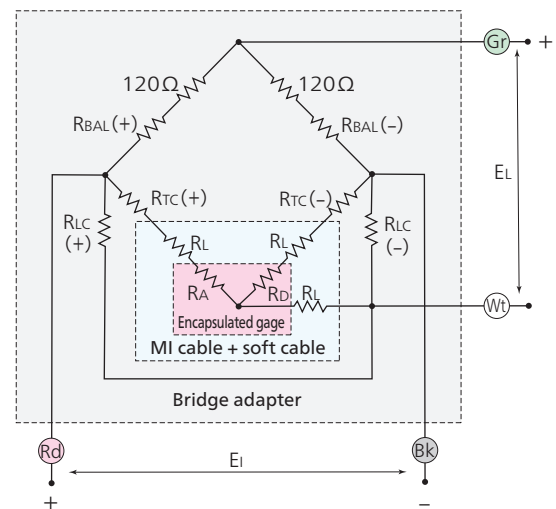

RA	Active element
RD	Dummy element
RL	Leadwire resistance
RTC (+), RTC (-)	Temp. *2 compensation resistor (sensing part)*1
RLC (+), RLC (-)	Temp. *2 compensation resistor (lead-wire)*1
RBAL (+), RBAL (-)	Balance adjustment resistor*1
EL	Bridge output voltage
Ei	Bridge application voltage
120Ω	Fixed resistor in bridge adapter

\*1 Inserted positions of asterisked resistors differ by product.  
\*2 Temp: Temperature



# Normal-temperature encapsulated gages

# KCW

(Weldable waterproof foil strain gage)

## Features

### Weldable type for easy handling on-site

The gage can be mounted easily to the measurement material using spot welding.  
The sensing part is covered with stainless steel and it requires no coating related to adhesion.  
Easy to take out with cable integrated structure.



### Excellent waterproofing and long-term stability

Offers waterproofing performance of approx. 10 MPa up to 24 hours.  
Able to be used for outdoor, underwater, and high humidity measurements.

### Low price

Lower pricing compared to the encapsulated gage for high-temperature applications.

Circuit

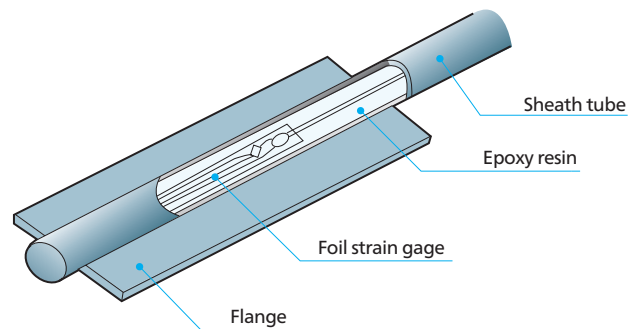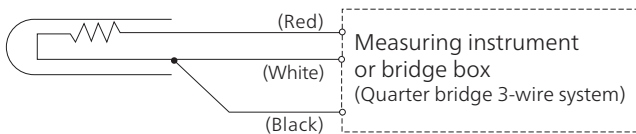

CE

The diagram illustrates the sensor cable assembly with the following components and dimensions:

- Sensing part:** A section of the cable with a length of 20 mm and a diameter of  $\phi 1.0$ .
- MI cable:** A section of the cable with a length of 8.5 mm and a diameter of  $\phi 2.4$ .
- Soft cable:** A section of the cable with a length of 40 mm and a diameter of  $\phi 2.4$ .
- Label:** A 40x20 mm label is attached to the soft cable.
- Bridge adapter:** A component that connects the soft cable to the input/output terminals.
- Transparent heat-shrink tube:** A tube that covers the bridge adapter and the connection points.
- Dimensions:** The total length of the assembly is 45 mm, and the length of the soft cable is 160 mm.
- Wiring:** The bridge adapter has four output wires (Grey, Green, Black, White) and one input wire (Red).

<b>Model</b>	For common steel	KHCX-10-120-G13-11 C2MV
	For Inconel 600	KHCX-10-120-G13-13 C2MV
<b>Gage type</b>	Uniaxial 2-element temperature-compensation type	
<b>Resistive element</b>	Heat-resistant special alloy	
<b>Sensing part</b>	Gage length	10 mm
	Flange	3 (W) × 20 (L) mm, t=0.1 mm
	Material	Sheath tube and flange: Inconel 600 (Equivalent to JIS NCF600)
<b>Gage resistance</b>	Approx. 120 Ω	
<b>Lead-wire cable</b>	MI cable: Inconel 600-sheathed 3-Ni-conductor cable, 1.6 mm diameter by approx. 2 m long (Standard)	
	Soft cable: ETFE-coated 3-conductor shielded cable, 1.7 mm diameter by approx. 50 cm long	
<b>Max. operating temperature</b>	Approx. 950°C	
<b>Applicable linear expansion coefficient</b>	11, 13×10 <sup>-6</sup> /°C	
<b>Gage factor</b>	Approx. 1.7 (Normal temperature)	
<b>(Sensing part only)</b>	Approx. 1.5 (950°C)	
<b>Thermally-induced apparent strain</b>	The estimated curve is shown on the test data sheet.	
<b>Compensated temperature</b>	25 to 950°C	
<b>Operating temperature</b>	-196 to 950°C	
<b>Max. allowable current</b>	50 mA	
<b>Min. radius of curvature</b>	75 mm	
<b>RoHS directive</b>	EN50581	

Actual value at 950°C (Reference)

Drift	Within $\pm 20 \mu\text{m}/\text{m}/\text{h}$
Strain limit	10000 $\mu\text{m}/\text{m}$
Fatigue life	$1 \times 10^6$ times, strain level: $\pm 100 \mu\text{m}/\text{m}$

- MI cable fixing metal belt  
(Length: 100 mm, x 2)
- Metal piece for welding test  
(Length: 30 mm, x 2)
- Test data sheet
- Instruction manual

For models with no bridge adapter, the following resistors are additionally included:

- Temperature-compensation resistor
- Bridge-balance resistor


- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

- Dynamic and stationary blades in high-temperature gas turbines
- Aircraft jet engine turbines
- Incinerators and heat treatment furnaces
- Petrochemical reactors
- Measuring physical characteristics of heat-resistant alloys

- Models with bridge adapter can be connected directly to a static strain measuring instrument such as UCAM via the bridge adapter cord. However, for dynamic strain measuring instrument such as EDX, optional input cable must be used for connection.
- Models with no bridge adapter require an optional dedicated adapter.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- When attaching the sensing part, avoid excessive force applied to the sensing part. Do not bend the sensing part.
- We recommend measuring instrument with constant direct current. (CDV etc.)
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.

# KHCV

## Dynamic Strain Measurement Only High-temperature encapsulated gages

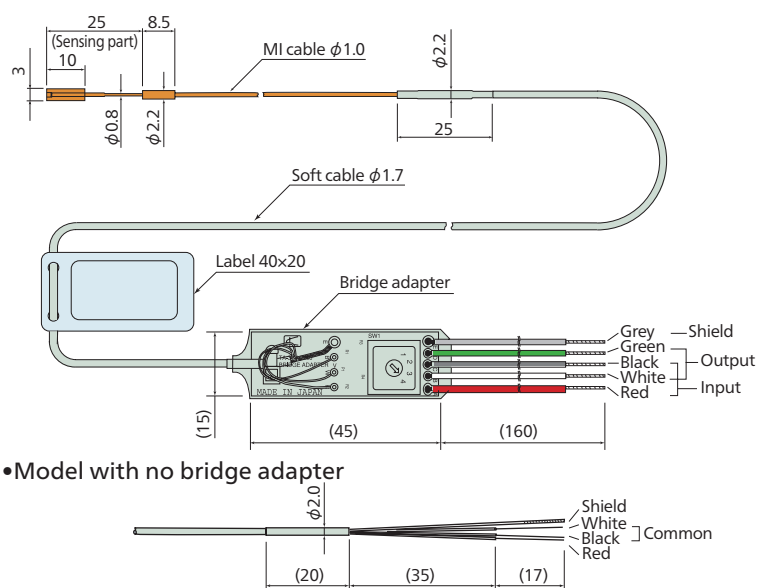

### Specifications

Model	KHCV-5-120-G17 C2MV
Gage type	Uniaxial 1-element
Resistive element	Heat-resistant special alloy
Sensing part	Gage length 5 mm Flange 3 (W) × 10 (L) mm, t=0.1 mm Material Sheath tube and flange: Inconel 600 (Equivalent to JIS NCF600)
Gage resistance	Approx. 120 Ω
Lead-wire cable	MI cable: Inconel 600-sheathed 3-Ni-conductor cable, 1.0 mm diameter by approx. 2 m long (Standard) Soft cable: ETFE-coated 3-conductor shielded cable, 1.7 mm diameter by approx. 50 cm long
Max. operating temperature	Approx. 800°C
Gage factor	Approx. 1.5 (Normal temperature)
(Sensing part only)	Approx. 1.2 (800°C)
Operating temperature	25 to 800°C
Max. allowable current	50 mA
Min. radius of curvature	15 mm
RoHS directive	EN50581

\*For the model with no bridge adapter, use the bridge box DB-120A/L.

### Actual value at 800°C (Reference)

Strain limit	10000 μm/m
Fatigue life	1×10 <sup>6</sup> times (800°C), strain level: ±500 μm/m

### Standard accessories

- MI cable fixing metal belt (Length: 100 mm, × 2)
  - Metal piece for welding test (Length: 30 mm, × 2)
  - Test data sheet
  - Instruction manual
- For models with no bridge adapter, the following resistors are additionally provided.
- Capacitors (1, 2.2, 10 μF)
  - Resistor (10 kΩ)

### Optional accessories

- Bridge box DB-120A/L (Page 12)
- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

### Example applications

- Dynamic and stationary blades in high-temperature gas turbines
- Aircraft jet engine turbines
- Incinerators and heat treatment furnaces
- Petrochemical reactors
- Measuring physical characteristics of heat-resistant alloys


### Precautions

- The KHCV is dedicated to dynamic strain measurements. Do not use it for static measurements.
- Use the DC-excited CDV signal conditioner as the measuring instrument.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.



# KHCR

## Static and Dynamic Strain Measurement High-temperature encapsulated gages

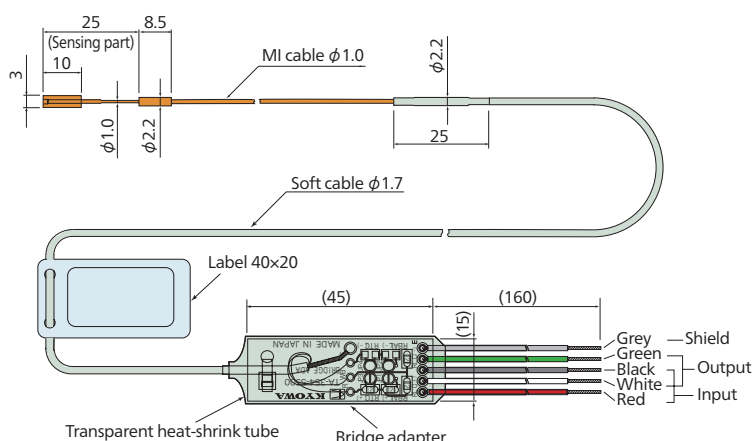

### Specifications

Model	For common steel	KHCR-5-120-G16-11 C2MV
	For Inconel 600	KHCR-5-120-G16-13 C2MV
	For stainless steel	KHCR-5-120-G16-16 C2MV
Gage type	Uniaxial 2-element temperature-compensation type	
Resistive element	Heat-resistant special alloy	
	Sensing part	
	Gage length	5 mm
Sensing part	Flange	3 (W) × 10 (L) mm, t=0.1 mm
	Material	Sheath tube and flange: Inconel 600(Equivalent to JIS NCF600)
Gage resistance	Approx. 120 Ω	
Lead-wire cable	MI cable: Inconel 600-sheathed 3-Ni-conductor cable, 1.0 mm diameter	
	by approx. 2 m long (Standard)	
	Soft cable: ETFE-coated 3-conductor shielded cable, 1.7 mm diameter	
Max. operating temperature	by approx. 50 cm long	
	Approx. 750°C	
	Applicable linear expansion coefficient	
	11, 13, 16×10 <sup>-6</sup> /°C	
Gage factor	Approx. 1.5 (Normal temperature)	
(Sensing part only)	Approx. 1.2 (750°C)	
Thermally-induced apparent strain	The estimated curve is shown on the test data sheet.	
Compensated temperature	25 to 750°C	
Operating temperature	25 to 750°C	
Max. allowable current	50 mA	
Min. radius of curvature	15 mm	
RoHS directive	EN50581	

\*Models with no bridge adapter are also available.

### Actual value at 750°C (Reference)

Drift	Within ±20 μm/m/h
Strain limit	10000 μm/m
Fatigue life	1×10 <sup>6</sup> times, strain level: ±500 μm/m

### Standard accessories

- MI cable fixing metal belt (Length: 100 mm, × 2)
  - Metal piece for welding test (Length: 30 mm, × 2)
  - Test data sheet
  - Instruction manual
- For models with no bridge adapter, the following resistors are additionally provided.
- Temperature-compensation resistor
  - Bridge-balance resistor

### Optional accessories

- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

### Example applications


- Dynamic and stationary blades in high-temperature gas turbines
- Aircraft jet engine turbines
- Incinerators and heat treatment furnaces
- Petrochemical reactors
- Measuring physical characteristics of heat-resistant alloys

### Precautions

- Models with bridge adapter can be connected directly to a static strain measuring instrument such as UCAM via the bridge adapter cord. However, for dynamic strain measuring instrument such as EDX, optional input cable must be used for connection.
- Models with no bridge adapter require an optional dedicated adapter.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.

# KHCS

## Static and Dynamic Strain Measurement High-temperature encapsulated gages

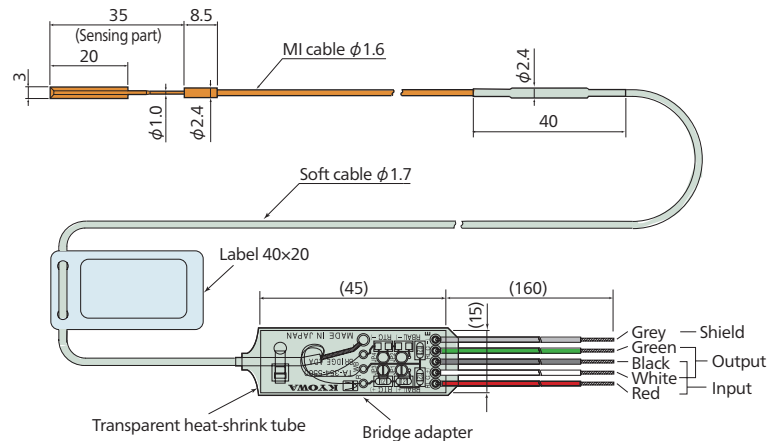

### Specifications

Model	For common steel	KHCS-10-120-G12-11 C2MV
	For Inconel 600	KHCS-10-120-G12-13 C2MV
	For stainless steel	KHCS-10-120-G12-16 C2MV
Gage type	Uniaxial 2-element temperature-compensation type	
Resistive element	Heat-resistant special alloy	
	Sensing part	
	Gage length	10 mm
	Flange	3 (W) × 20 (L) mm, t=0.1 mm
Gage resistance	Material Sheath tube and flange: Inconel 600 (Equivalent to JIS NCF600)	
	Approx. 120 Ω	
Lead-wire cable	MI cable: Inconel 600-sheathed 3-Ni-conductor cable, 1.6 mm diameter	
	by approx. 2 m long (Standard)	
	Soft cable: ETFE-coated 3-conductor shielded cable, 1.7 mm diameter	
Max. operating temperature	by approx. 50 cm long	
	Approx. 750°C	
Applicable linear expansion coefficient	11, 13, 16×10 <sup>-6</sup> /°C or user-specified	
Gage factor	Approx. 2.0 (Normal temperature)	
(Sensing part only)	Approx. 1.8 (750°C)	
Thermally-induced apparent strain	The estimated curve is shown on the test data sheet.	
Compensated temperature	25 to 750°C	
Operating temperature	-196 to 750°C	
Max. allowable current	50 mA	
Min. radius of curvature	20 mm	
RoHS directive	EN50581	

\*Models with no bridge adapter are also available.

### Actual value at 750°C (Reference)

Drift	Within ±10 μm/m/h
Strain limit	10000 μm/m
Fatigue life	1×10 <sup>6</sup> times, strain level: ±500 μm/m

### Standard accessories

- MI cable fixing metal belt (Length: 100 mm, × 2)
  - Metal piece for welding test (Length: 30 mm, × 2)
  - Test data sheet
  - Instruction manual
- For models with no bridge adapter, the following resistors are additionally provided.
- Temperature-compensation resistor
  - Bridge-balance resistor

### Optional accessories

- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

### Example applications


- Dynamic and stationary blades in high-temperature gas turbines
- Aircraft jet engine turbines
- Incinerators and heat treatment furnaces
- Petrochemical reactors
- Measuring physical characteristics of heat-resistant alloys

### Precautions

- Models with bridge adapter can be connected directly to a static strain measuring instrument such as UCAM via the bridge adapter cord. However, for dynamic strain measuring instrument such as EDX, optional input cable must be used for connection.
- Models with no bridge adapter require an optional dedicated adapter.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.

# KHCM

## Static and Dynamic Strain Measurement High-temperature encapsulated gages

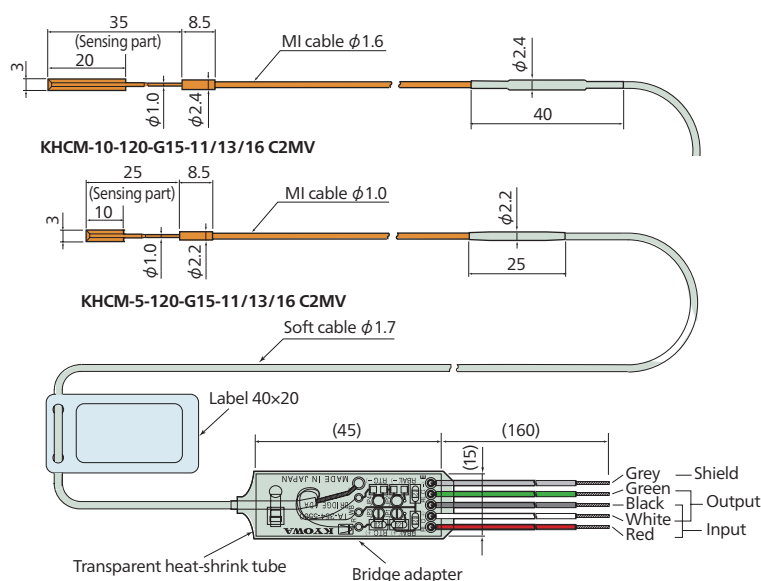

### Specifications

	KHCM-10	KHCM-5
Model	For common steel KHCM-10-120-G15-11 C2MV For Inconel 600 KHCM-10-120-G15-13 C2MV For stainless steel KHCM-10-120-G15-16 C2MV	KHCM-5-120-G15-11 C2MV KHCM-5-120-G15-13 C2MV KHCM-5-120-G15-16 C2MV
Gage type	Uniaxial 2-element temperature-compensation type	
Resistive element	Heat-resistant special alloy	
Sensing part	Gage length 10 mm	5 mm
	Flange 3 (W) × 20 (L) mm, t=0.1 mm	3 (W) × 10 (L) mm, t=0.1 mm
	Material Sheath tube and flange: Inconel 600 (Equivalent to JIS NCF600)	
Gage resistance	Approx. 120 Ω	
Lead-wire cable	MI cable 1.6 mm diameter by approx. 2 m long (Standard)	1.0 mm diameter by approx. 2 m long (Standard)
	Inconel 600-sheathed 3-Cu-conductor cable	
	Soft cable ETFE-coated 3-conductor shielded cable, 1.7 mm diameter by approx. 50 cm long	
Max. operating temperature	Approx. 650°C	
Applicable linear expansion coefficient	11, 13, 16×10 <sup>-6</sup> /°C or user-specified	
Gage factor	Approx. 2.0 (Normal temperature)	Approx. 1.5 (Normal temperature)
(Sensing part only)	Approx. 1.8 (650°C)	Approx. 1.4 (650°C)
Thermally-induced apparent strain	The estimated curve is shown on the test data sheet.	
Compensated temperature	25 to 650°C	
Operating temperature	-196 to 650°C	
Max. allowable current	50 mA	
Min. radius of curvature	20 mm	15 mm
RoHS directive	EN50581	

\*Models with no bridge adapter are also available.

### Actual value at 650°C (Reference)

Drift	Within ±10 μm/m/h	Within ±20 μm/m/h (650°C)
Strain limit	10000 μm/m	
Fatigue life	1×10 <sup>6</sup> times, strain level: ±500 μm/m	

### Standard accessories

- MI cable fixing metal belt (Length: 100 mm, × 2)
  - Metal piece for welding test (Length: 30 mm, × 2)
  - Test data sheet
  - Instruction manual
- For models with no bridge adapter, the following resistors are additionally provided.
- Temperature-compensation resistor
  - Bridge-balance resistor

### Optional accessories


- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

### Example applications

- Around nuclear power reactors
- Heat exchangers in thermal power stations
- Cooling waterpipe (sodium) in nuclear power reactors
- Fast breeder reactors
- Automobile exhaust manifolds
- Understanding physical characteristics of automobile exhaust turbines/mufflers/valves

### Precautions

- Models with bridge adapter can be connected directly to a static strain measuring instrument such as UCAM via the bridge adapter cord. However, for dynamic strain measuring instrument such as EDX, optional input cable must be used for connection.
- Models with no bridge adapter require an optional dedicated adapter.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.

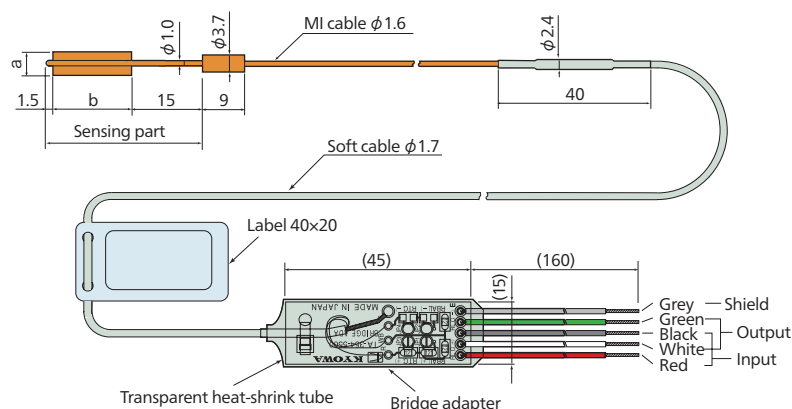

Type			Type		
	a	b		a	b
KHC-10-120-G8	4	16.5	KHC-20-120-G8	4	30
KHC-10-120-G9	5	16.5	KHC-20-120-G9	5	30

### Specifications

	KHC-20	KHC-10
Model	For common steel KHC-20-120-G8-11 C2MV KHC-20-120-G9-11 C2MV For Inconel 600 KHC-20-120-G8-13 C2MV KHC-20-120-G9-13 C2MV For stainless steel KHC-20-120-G8-16 C2MV KHC-20-120-G9-16 C2MV	KHC-10-120-G8-11 C2MV KHC-10-120-G9-11 C2MV KHC-10-120-G8-13 C2MV KHC-10-120-G9-13 C2MV KHC-10-120-G8-16 C2MV KHC-10-120-G9-16 C2MV
Gage type	Uniaxial 2-element temperature-compensation type	
Resistive element	Heat-resistant special alloy	
Sensing part	Gage length: 20 mm	10 mm
Flange	Width and length: See the dimensional drawing above. t=0.1 mm	
Material	G8 Sheath tube and flange: Inconel 600 (equivalent to JIS NCF600) G9 Sheath tube and flange: SUS321	
Gage resistance	Approx. 120 Ω	
Lead-wire cable	MI cable 1.6 mm diameter by approx. 2 m long (Standard), G8: Inconel 600, G9: SUS347 Soft cable ETFE-coated 3-conductor shielded cable, 1.7 mm diameter by approx. 50 cm long	
Max. operating temperature	Dynamic strain: Approx. 550°C, Static strain: Approx. 500°C	
Applicable linear expansion coefficient	11, 13, 16×10 <sup>-6</sup> /°C or user-specified	
Gage factor	Approx. 1.9 (Normal temperature)	Approx. 1.6 (Normal temperature)
(Sensing part only)	Approx. 1.75 (500°C)	Approx. 1.5 (500°C)
Thermally-induced apparent strain	The estimated curve is shown on the test data sheet.	
Compensated temperature	25 to 500°C	
Operating temperature	Dynamic strain: -196 to 550°C, Static strain: -196 to 500°C	
Max. allowable current	30 mA	
Min. radius of curvature	25 mm	20 mm
RoHS directive	EN50581	

### Actual value (Reference)

Drift	Within ±20 μm/m/h (500°C)	
Strain limit	8000 μm/m (Normal temperature)	5000 μm/m (Normal temperature)
Fatigue life	4×10 <sup>5</sup> times (25°C, 500 μm/m)	

### Precautions

- Models with bridge adapter can be connected directly to a static strain measuring instrument such as UCAM via the bridge adapter cord. However, for dynamic strain measuring instrument such as EDX, optional input cable must be used for connection.
- Models with no bridge adapter require an optional dedicated adapter.
- Prior to use, "High-temperature encapsulated gages, Features" (page 2) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.

### Standard accessories

- MI cable fixing metal belt (Length: 100 mm, × 2)
  - Metal piece for welding test (Length: 30 mm, × 2)
  - Test data sheet
  - Instruction manual
- For models with no bridge adapter, the following resistors are additionally provided.
- Temperature-compensation resistor
  - Bridge-balance resistor

### Optional accessories


- Bridge adapter (Page 12)
- Compression fitting (Page 13)
- Compact spot welder GW-3C (Page 14)

### Example applications

- Nuclear fuel rods
- Boiler steam turbines
- Around high-temperature furnaces for steel manufacturing
- Fireproof tests for steel reinforced concrete structure
- Automobile exhaust valves
- Cooling pipes (pure water) in nuclear power stations
- Gas turbine combustors
- Automobile cylinder heads
- Automobile pistons
- Measuring physical characteristics of heat-resistant alloys

# KCW

## Static and Dynamic Strain Measurement Normal-temperature weldable waterproof foil strain gages

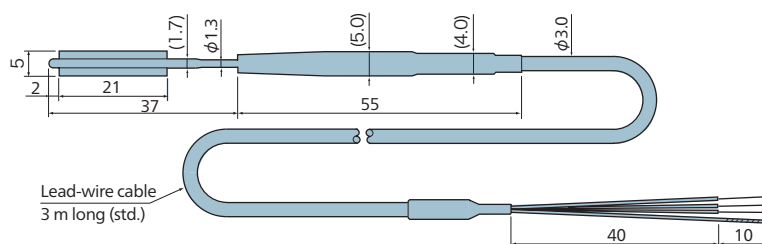

### For measurement outdoors, involving water and high humidity

Normal-temperature encapsulated gage KCW comprises of a sensing part in which a foil strain gage is sealed in a stainless tube embedded in epoxy resin, and a crosslinked polyethylene-sheathed cable built into the sensing part to provide an environmentally resistant structure.

The sensing part is fixed on the measurement material by spot welding.

Its price is lower than that of the encapsulated gage for use at high temperatures.

### Specifications

Model	For common steel	KCW-5-120-G10-11 G3M3S
Gage type	Uniaxial 1-element	
Resistive element	NiCr alloy	
Sensing part	Gage length	5 mm
	Flange	5 (W) × 21 (L) mm, t=0.1 mm
	Material	Sheath tube and flange: Stainless steel
Gage resistance	Approx. 120 Ω	
Lead-wire cable	Polyethylene-coated crosslink 3-conductor cable, 3 mm diameter by approx. 3 m long (Standard)	
Max. operating temperature	Approx. 100°C	
Applicable linear expansion coefficient	11×10 <sup>-6</sup> /°C	
Gage factor	Approx. 2.2	
Compensated temperature	10 to 90°C	
Operating temperature	-20 to 100°C	
Waterproof	Approx. 10 MPa for 24 hours	
Min. radius of curvature	20 mm	
Standard packing quantity	2	

### Actual value (Reference)

Strain limit	5000 μm/m
Fatigue life	1×10 <sup>6</sup> times, strain level: ±1000 μm/m
Stability (Drift)	Within ±100 μm/m/500 h (80°C, 90%RH or higher, 1000 hours)
	Within ±40 μm/m/500 h (Soaked condition, 1000 hours)

### Standard accessories

- Lead-wire cable fixing metal belt (Length: 100 mm, × 4)
- Metal piece for welding test (Length: 30 mm, × 2)
- Test data sheet
- Instruction manual

### Optional accessories

- Bridge box DB-120A/L (Page 12)
- Compact spot welder GW-3C (Page 14)

### Lead-wire cable lengths and codes

Lead-wire cable length	Code
15 cm	G15C3S
30 cm	G30C3S
1 m	G1M3S
3 m (Standard)	G3M3S
5 m	G5M3S

\*When ordering, specify the model number together with the code of the desired cable length, suffixed with a space in between.

Example)

For KCW with 5 m long polyethylene-coated crosslink 3-conductor cable  
KCW-5-120-G10-11 G5M3S

### Example applications

- Boiler water pump in thermal power stations
- Various plumbing of large plants
- Ship structures (in seawater)
- Underwater tests of steel reinforced concrete structures
- Automobile intake blowers
- Automobile bodies

### Precautions

- Prior to use, "Normal-temperature encapsulated gages, Features" (page 4) must be studied and items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.
- The specifications are for reference purpose only. Actual values may vary depending on operating conditions including temperatures.



To connect measuring instruments

# Optional accessories

## Bridge boxes DB-120A/L

Designed to configure a Wheatstone bridge circuit with the KHCV or KCW connected.

### DB-120A

Cable: Chloroprene-coated, 5 m long, terminated with NDIS connector plug  
Dimensions: 60 × 42 × 25 mm  
Weight: Approx. 600 g (Including cable)




### DB-120L (Compact plug-in type)

Cable: Removable connection cable, 5 m long, terminated with NDIS connector plug  
Dimensions: 60 × 20 × 20 mm  
Weight: Approx. 60 g (Main unit only)





KHCV measuring circuit

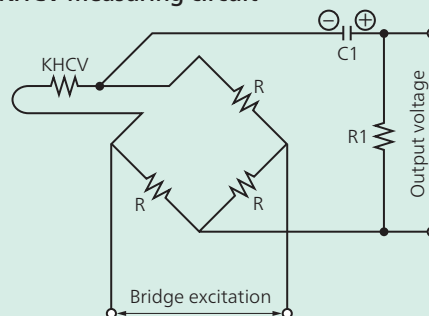

R: 120  $\Omega$  (Fixed resistor)  
R1: 10 k $\Omega$  (Accessory)  
C1: Selected from 1, 2.2 or 10  $\mu$ F (Accessory)



## Half bridge adapter

This is an adaptor having temperature-compensating resistors best suited for the temperature range of your use on a substrate attached to a soft cable. Through the use of this adaptor, improper wiring can be eliminated and work can be saved.

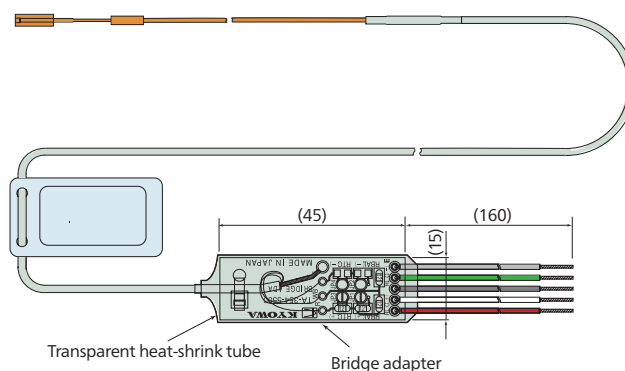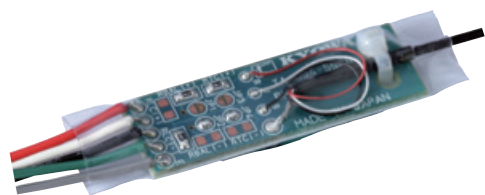


## Quarter bridge adapter

The dedicated bridge adapter for KHCV allows for easy selection of cut-off frequency (1.6, 7.23, 16 Hz, FLAT). Able to be connected easily to the measuring instrument and eliminates risks of improper wiring.

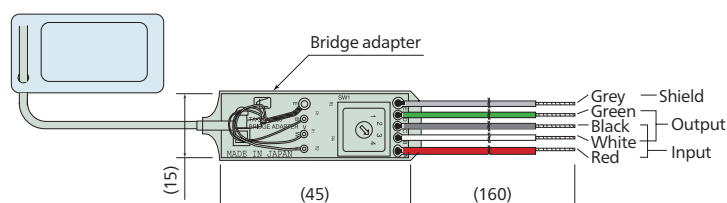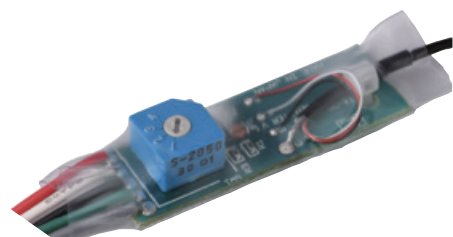

## Compression fitting

At your request, we will add compression fitting for attaching the MI cable.  
Please request its installation when placing an order.

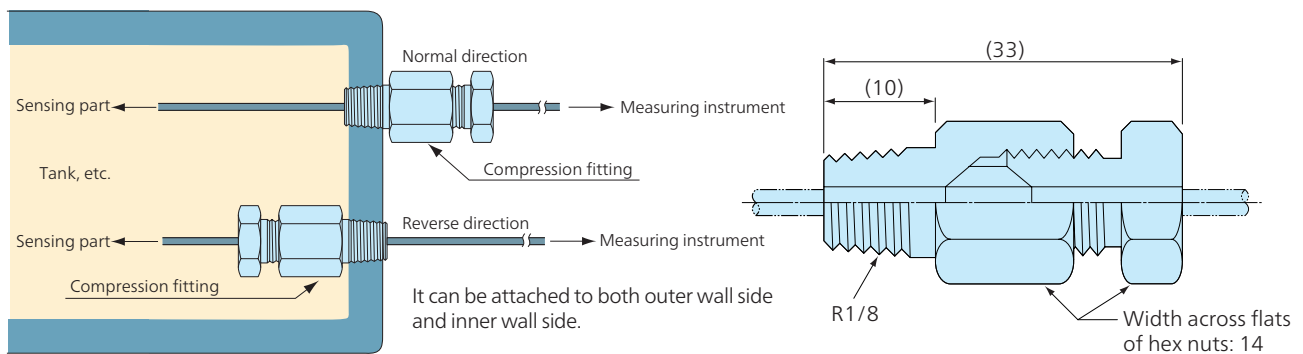

## MI cable length codes and optional accessories

When ordering, specify the model number together with the code of the desired MI cable length, suffixed with a space in between. The suffix may include codes of the optional bridge adapter and compression fitting. (See table at the bottom.) In all cases, the length of the soft cable is 50 cm. (For extension, contact us.)

### Examples

- For KHCS with 5 m long MI cable  
KHCS-10-120-G12-11 C5M
- For KHCS with 2 m long MI cable and bridge adapter pre-attached  
KHCS-10-120-G12-11 C2MV

MI cable length	Code	With bridge adapter ①	With compression fitting ②	①+②
1 m	C1M	C1MV	C1MF	C1MFV
2 m (Standard)	C2M	C2MV	C2MF	C2MFV
3 m	C3M	C3MV	C3MF	C3MFV
4 m	C4M	C4MV	C4MF	C4MFV
5 m	C5M	C5MV	C5MF	C5MFV
6 m	C6M	C6MV	C6MF	C6MFV
8 m	C8M	C8MV	C8MF	C8MFV
10 m	C10M	C10MV	C10MF	C10MFV

# GW-3C

## Compact spot welder for encapsulated gages

### Features

- Welding current output is suitable for stainless steel, enabling welding of 0.3 mm thick stainless steel sheets.
- The electrode is 1 mm diameter at both ends.
- To enable optimum welding, energy is switchable between high and low ranges and is continuously variable in each range.
- An aluminum trunk is optionally available for transportation and storage.



CE

### Specifications

Welding energy (COARSE)	LOW	0 to 25 W-s, continuously variable (FINE 0 to 10)
	HIGH	0 to 50 W-s, continuously variable (FINE 0 to 10)
Welding speed	1 W-s	150 times/minute
	5 W-s	120 times/minute
	10 W-s	80 times/minute
	20 W-s	60 times/minute
	50 W-s	30 times/minute
Operating temp. & humidity ranges	0° to 40°C, 85% RH or less	
Storage temperature range	-10° to 60°C	
Power supply	90 to 110 VAC, 500 VA or less	
Dimensions	183 W × 153 H × 313 D mm (Excluding protrusions)	
Weight	Approx. 8.2 kg (mainframe)	

\*Products corresponding to welding speed 50 W · s, approx. 180 times/minute can also be manufactured.  
(Note: Does not comply with overseas laws and regulations. For use in Japan only.) Please contact us for details.

### Standard accessories

- Square welding head (With cable approx. 1.3 m long)
- Grounding clip (With cable approx. 1.3 m long)
- Electrode (GW-02)
- Metal file
- Fuse (5 A)
- Hexagon wrench
- Instruction manual

### Optional accessories

- Aluminum trunk (GW-01)


### Precautions

Items stated in "In order to use encapsulated gages correctly" (page 15) must be observed.

### Stainless steel sheet thickness and FINE control setting reference values

Stainless steel sheet thickness (mm)	COARSE range		Welding energy (W·S)
	LOW	HIGH	
0.1	2	1	5
0.2	6	3	15
0.3	—	6	30


### Welding capability

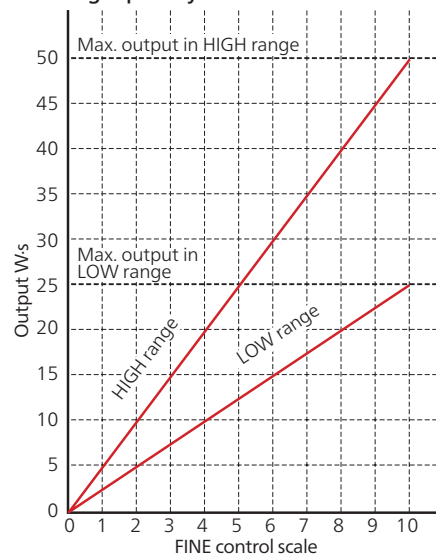


Max. continuous usage shall not exceed the following:

- 4 minutes continuous at 1 second interval using HIGH range and FINE5.
- 10 minutes continuous at 1 second interval using LOW range and FINE10.


### Specifications

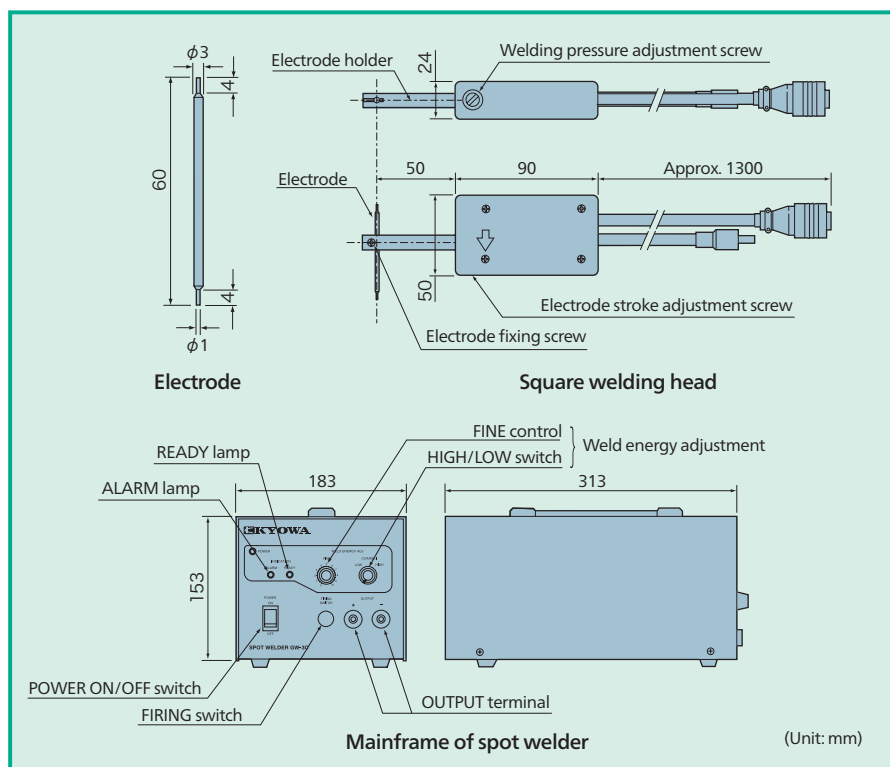


# In order to use encapsulated gages correctly

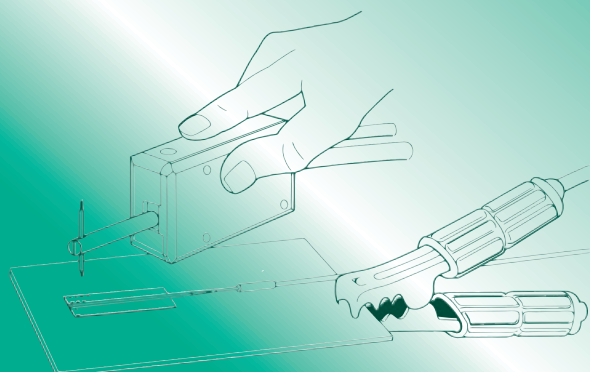


- Be sure to read the instruction manual before use.
- Spot welding can be performed on ferrous materials, but cannot be performed on aluminum, copper, or ceramic materials.
- Surface treatment: Remove rust and paint from the surface of the measuring point by polishing with sandpaper (#320, etc.). Wipe away dirt and oil with a solvent such as acetone. While the flange is cleaned by sand-blasting at the factory, degrease it with acetone or the like as required.
- Be sure not to cut the MI cable or make any hole on it. The insulating material filled in the cable may absorb moisture through a hole, thereby disabling measurement.
- To prevent the sensing part from any damage due to tension or twisting caused by the weight or handling of the MI cable, fix the connection between the sensing part and MI cable, and the MI cable at proper intervals using accessory metal belts. Then, spot-weld the flange. (Fig. 1)
- Apparent strain is generated when external pressure is applied.

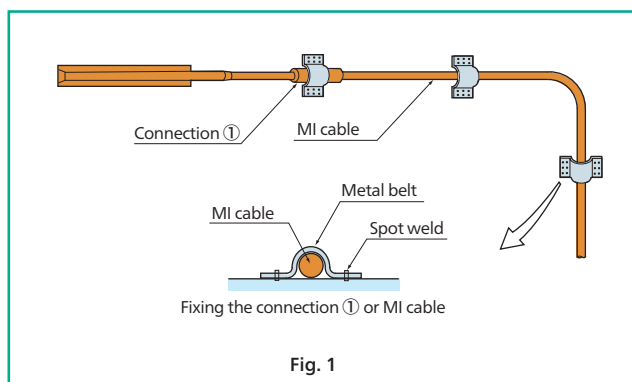


- Spot-welding the flange: It is recommended to use Kyowa GW-3C compact spot welder (see page 14). When spot welding the flange, temporarily weld the center point and then perform welding in the order shown in the figure. Standard welding conditions are as follows:  
Tip of electrode: 0.8 mm diameter  
Welding energy: Approx. 10 W·s  
Electrode pressing force: Approx. 10 N (Fig. 2)

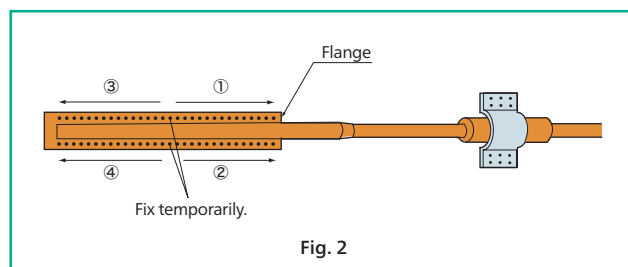

Note:  
Add another line of welding spots to the end of the center line. (Fig. 3)

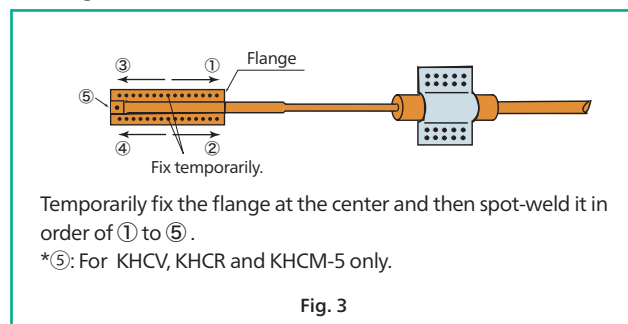


- Spot-welding the flange to a curved surface: Before spot welding the flange, bend the flange along another curvature, such as a pipe, having the same radius of curvature as the material location. (Fig. 4) If the curvature radius and curved direction are specified when ordering, the gage will be delivered with the specified shape.

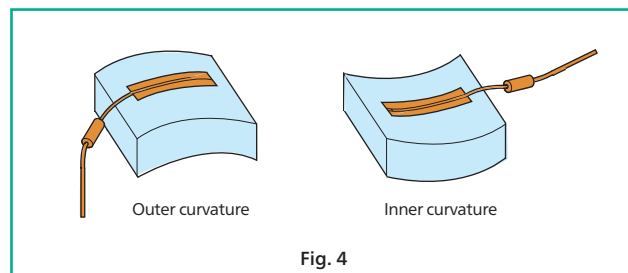

- For the temperature compensation method, refer to "Temperature compensation methods and bridge circuits (KHCX, KHCR, KHCS, KHCM, KHC)," page 3.

# Performing a preliminary test

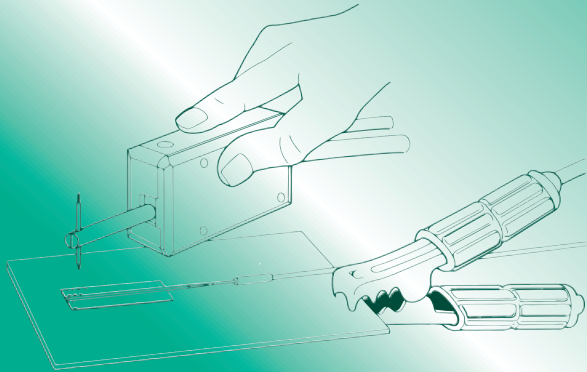


The characteristics of the encapsulated gage specified in the catalog and specification document are for reference only. The values are subject to operating conditions including the temperature. In order to improve accuracy of measurements, we recommend a preliminary test using the actual device followed by a calibration using the preliminary test result.

[Test example]

## ● Attaching the encapsulated gage

Follow the instruction manual to attach the encapsulated gage to the object to be measured.

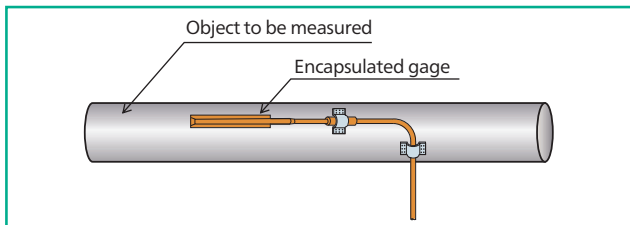


## ● Checking the zero temperature effect

Using a thermostatic chamber, check the apparent strain at the temperature of the actual test.

〈Precautions〉

When the encapsulated gage welded to the object to be measured is subjected to the temperature rise and fall cycle, the state of attachment and/or spot welding may affect the output. This may result in fluctuation between the temperature rise and fall cycles or between the first cycle and second cycle onwards. The process may also produce residual output after the temperature returns to normal temperature. Although this thermal hysteresis generally decreases gradually through repetitive temperature cycles, the temperature drift may affect the output of the encapsulated gage itself through increase in the number of repetitive temperature cycles.

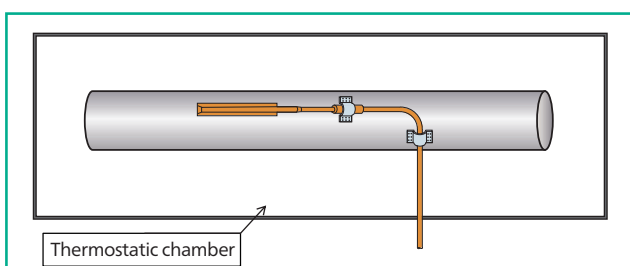


## ● Checking the gage factor

Check the output of the encapsulated gage against the strain of the object to be measured placed under load. Using a thermostatic chamber set to the temperature to be used in the actual test, the output of the encapsulated gage under load must be tested. The thermostatic chamber must be able to withstand the applied load.

The applied load should be appropriate for the deformation mode. A simulation must be performed in advance to estimate the deformation mode of the actual test.

〈Precautions〉


Since the thickness of the object to be measured affects the measurement value, a calibration must be performed. When measuring the bending strain, the measured value becomes larger than that of the actual strain. As the thickness of the object to be measured decreases, this effect becomes more exaggerated. In addition, the size of the object to be measured must be accounted for. This is due to the rigidity of the encapsulated gage itself losing its negligibility when the size of the object to be measured is small. Under such condition, the surface strain of the area where the gage is attached to can be affected because of the neutral axis of the object to be measured is shifted.

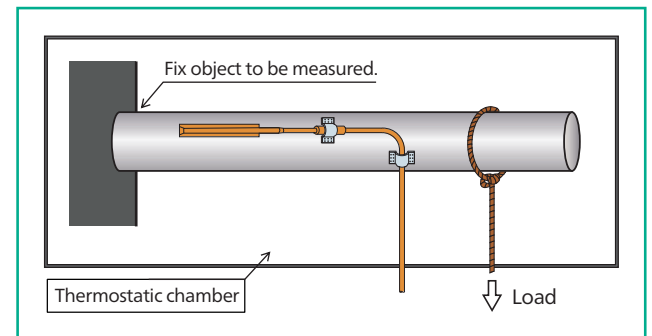

(Reference) Checking the gage factor at normal temperatures

When the above procedure for checking the output of the encapsulated gage under load using the temperature of the actual test cannot be performed, first check the gage factor at normal temperature and then use the table of the test data sheet to estimate the gage factor at the temperature of the actual test.

Alternatively, a foil strain gage can be used as a reference tool to check the gage factor at normal temperature. When a foil strain gage is used to check the gage factor, ensure the foil strain gage is removed before placing the object to be measured in the high temperature of the actual test.

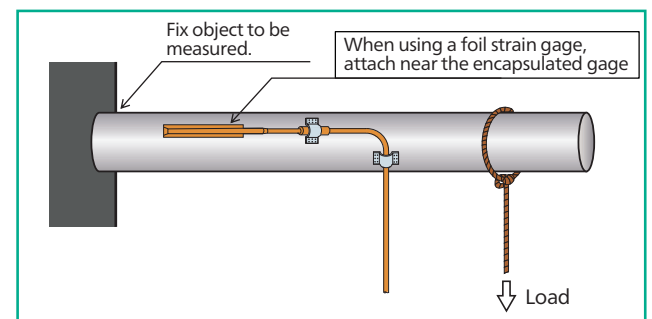

## ● Checking apparent strain caused by pressure

When the ambient pressure of the actual test differs greatly from the atmospheric pressure, we recommend that the calibration of the gage meets the apparent strain caused by pressure. To perform this calibration, first remove the load applied to the object to be measured and then apply only the ambient pressure to check the apparent strain caused by pressure.

## ● Undertaking the actual test

After undertaking the actual test, perform calibration of the measurement data using the "zero temperature effect", "gage factor" and "apparent strain caused by pressure", which were obtained in the preliminary test.



Please fill the following form when ordering or inquiring the encapsulated gages.

Date : \_\_\_\_\_

Company name (school name)			
ZIP/Postal code Address			
Department		Your name	
Telephone		E-mail address	
Facsimile			

Items		Details	Supplements
1	Application	Business fields ( ) <input type="checkbox"/> a. Experiment and research ( ) <input type="checkbox"/> b. Management and survey ( )	
2	Operating environment	<input type="checkbox"/> a. Laboratory <input type="checkbox"/> b. Plant <input type="checkbox"/> c. Moving object ( <input type="checkbox"/> vehicle, <input type="checkbox"/> railroad, <input type="checkbox"/> aircraft, <input type="checkbox"/> others )	
3	Models	<input type="checkbox"/> a. KHCX <input type="checkbox"/> b. KHCV <input type="checkbox"/> c. KHCN <input type="checkbox"/> d. KHCS <input type="checkbox"/> e. KHCM <input type="checkbox"/> f. KHC <input type="checkbox"/> g. Custom-made (model )	
4	Detailed models Quantity	( ) ( )	
5	Welding methods	<input type="checkbox"/> a. Spot welding (GW-3C) <input type="checkbox"/> b. Spot welding (others)	
6	Curvature radius of welding area	<input type="checkbox"/> a. Flat <input type="checkbox"/> b. Curve (curvature radius:          mm, inside/outside)	
7	Welding space	(          mm    ×          mm )	
8	Operating temperature	Temperature (          °C )	
9	Cable length, etc.	Heated length (          m ) (in MI cable) Non-heated length (          m ) (in soft cable) Bridge adapter ( <input type="checkbox"/> required / <input type="checkbox"/> not required )	
10	Strain	Expected strain (          to          μm/m )	
11	Measurement object	Materials (          ) Linear expansion coefficient (          ppm/°C )	
12	Test conditions	<input type="checkbox"/> a. Dynamic (1 Hz or faster) <input type="checkbox"/> b. Static (slower than 1 Hz) <input type="checkbox"/> c. Thermal stress	
13	Test time	<input type="checkbox"/> a. Continuously <input type="checkbox"/> b. Intermittently (every          houes) <input type="checkbox"/> c. Cycle test (          to          °C,          h/cycle ×          times )	
14	Special instruction (test environments, etc.)	Ambient environment <input type="checkbox"/> Gas (          ) / <input type="checkbox"/> Seawater / <input type="checkbox"/> Pure water / <input type="checkbox"/> Others (          ) Ambient pressure (          Mpa / <input type="checkbox"/> atmospheric pressure ) a. Vibration (          G,          to          Hz ) b. Impact (          G ) c. <input type="checkbox"/> Non-rotating object / <input type="checkbox"/> Rotating object (          G )	
15	Actual calibration	Actual load calibration <input type="checkbox"/> a. Yes <input type="checkbox"/> b. No Thermometry in no load <input type="checkbox"/> c. Yes <input type="checkbox"/> d. No	
16	Bridge excitation	Voltage (          V ) <input type="checkbox"/> a. Dynamic strain amplifier (DC type / AC type) <input type="checkbox"/> b. Static strain amplifier	
17	Others		
18	Name of sales representatives		

# You can count on Kyowa.

Feel free to contact us,  
if there is something you would like to know or  
do not understand about Kyowa products.



## Sales Network



### Americas Region

KYOWA AMERICAS, Inc.  
TEL: +1-248-348-0348  
E-mail: [sales@kyowa-americas.com](mailto:sales@kyowa-americas.com)  
Website: <http://www.kyowa-ei.us/>

### China

KYOWA ELECTRONIC(SHANGHAI)TRADING CO.,LTD.  
TEL: +86-21-64477770  
E-mail: [support-cn@d1.kyowa-ei.co.jp](mailto:support-cn@d1.kyowa-ei.co.jp)  
Website: <http://www.kyowa-ei.cn/>

### Thailand

KYOWA DENGYO(THAILAND) CO.,LTD.  
TEL: +66-2-117-3760  
E-mail: [sales-thailand@kyowa-ei.co.th](mailto:sales-thailand@kyowa-ei.co.th)  
Website: <http://www.kyowa-ei.co.th/>

### Other Countries or Regions

Please visit below URL.  
Website: <http://www.kyowa-ei.com/>

## Kyowa Electronic Instruments Co.,Ltd.

Overseas Department:  
3-5-1, Chofugaoka, Chofu, Tokyo 182-8520 Japan  
TEL; +81-42-489-7220 FAX: +81-42-488-1122  
E-mail: [overseas@kyowa-ei.co.jp](mailto:overseas@kyowa-ei.co.jp)  
Website: <http://www.kyowa-ei.com/>



### Safety Precautions

Be sure to observe the safety precautions given in the instruction manual, in order to ensure correct and safe operation.

• Specifications are subject to change without notice for improvement.



JQA-0821  
JQA-EM4824

Manufacturer's Representative